

# CR2032

3V Lithium Battery  
Swiss Made


## Technical Data Sheet

### Specifications

|                              |                       |
|------------------------------|-----------------------|
| Chemical System              | Li / MnO <sub>2</sub> |
| Nominal Voltage              | 3 V                   |
| Rated Capacity               | 235 mAh               |
| Standard Discharge Current   | 0,4 mA                |
| Max. Cont. Discharge Current | 3,0 mA                |
| Average Weight               | 2,8 g                 |
| Temperature Range            | -30 - +70 °C          |
| Self Discharge at 23°C       | < 1% / year           |


### Dimensions

(According to IEC 60086)

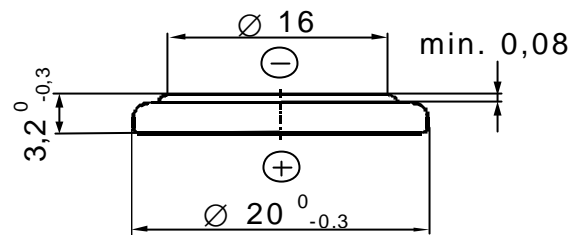


### Performance


Discharge performance at 23°C

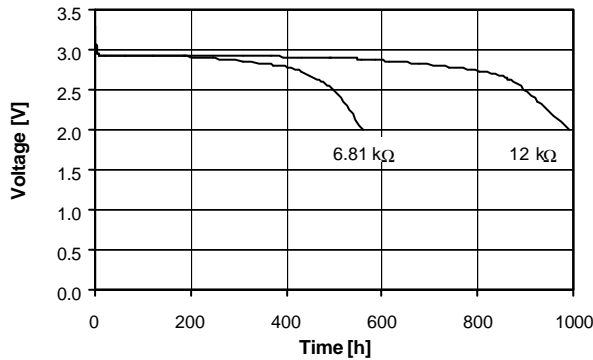


Discharge performance at 23°C

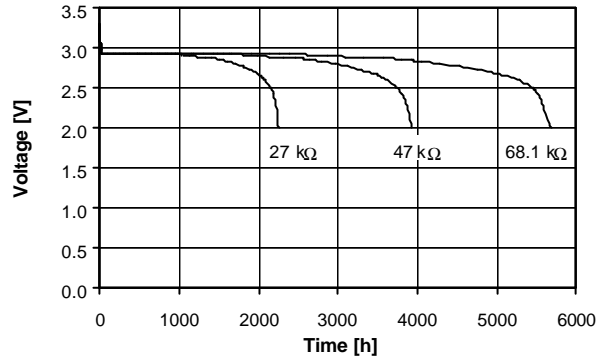

Temperature performance Load 12kW

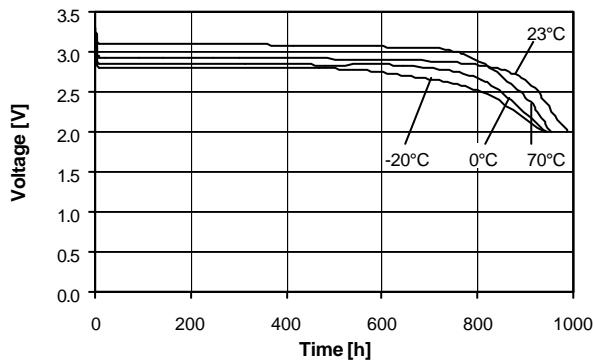

Cell capacity at various loads

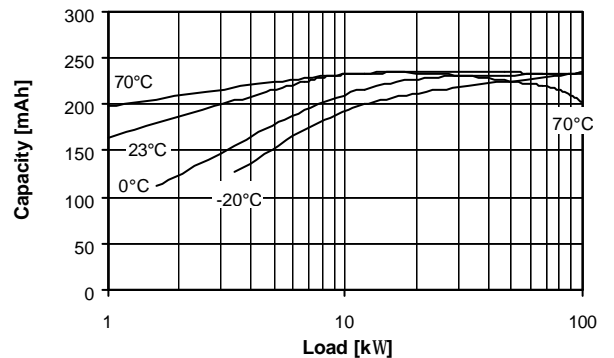

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. CR2032.05 10/01